

RF SPEC.


频率范围	插入损耗	驻波	隔离度	承载功率
DC-3GHZ	<0.20dB	<1.20	>80dB	85W
3-6GHZ	<0.30dB	<1.30	>70dB	60W
6-12.4GHZ	<0.40dB	<1.40	>65dB	40W
12.4-18GHZ	<0.50dB	<1.50	>60dB	20W




性能参数

外型尺寸 (mm)

RF 阻抗 50 ohm
 切换寿命 >100 万次
 切换模式 先断后和
 工作温度范围 -25 ~ +60℃
 RF 接口 SMA female
 重量:

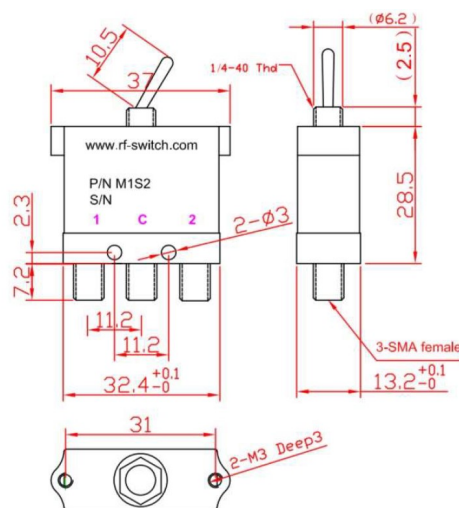

原理图



产品编号选择

- M1S2-3** (SPDT Manual /DC-3GHZ/SMA female)
- M1S2-6** (SPDT Manual /DC-6GHZ/SMA female)
- M1S2-12** (SPDT Manual /DC-12.4GHZ/SMA female)
- M1S2-18** (SPDT Manual /DC-18GHZ/SMA female)



Tel :0086-10-82087227

Fax:0086-10-82087380

E-mail: sales@rf-switch.com

Web site: www.rf-switch.com