


RF SPEC.

Frequency Range	Insertion Loss	VSWR	Isolation	Power Handling
DC-1GHZ	<0.30dB	<1.20	>60dB	1W
1-2GHZ	<0.50dB	<1.40	>50dB	1W
2-3GHZ	<1.10dB	<1.60	>40dB	1W



Characteristics	Outline Drawing (mm)
RF Impedance 50 ohm	
Control Voltage/Current: DC12V /60mA	
DC24V / 60mA	
Switching Time <10ms	
Operating Life >30,0000	
Operating Temperature -30 ~ +60°C	
RF Interface F /BNC female	
Weight:	

Schematics

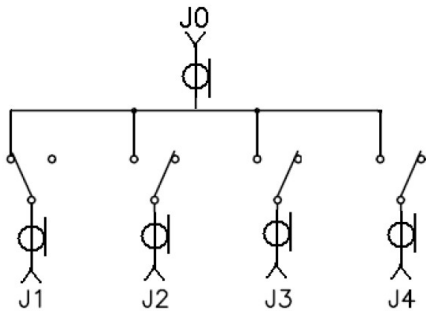

RF Path

- C2=C3=C4=0V, J0 to J1
- C2=12V,C3=C4=0V, J0 to J2
- C3=12V,C2=C4=0V, J0 to J3
- C4=12V,C2=C3=0V, J0 to J4

Part Number Selector

P/N:CUS1201 -

BNC female 1 2 DC12V

F female 2 4 DC24V

CUS1201-12 (75 ohm SP4T Failsafe Type/DC12V/DC-3GHZ/BNC female)

CUS1201F-24 (75 ohm SP4T Failsafe Type/DC24V/DC-3GHZ/F female)



Tel :10-82087227
Fax:10-82087380

E-mail: sales@rf-switch.com
Web site: www.rf-switch.com